

3500 Series Revolving Door




A CLASSIC AND CONTEMPORARY STYLE REVOLVING DOOR ENTRANCE

- All glass - no visible door stiles
- Enclosure drum wall base rail surface mounted to the floor
- Upper and lower pressure release mechanisms are concealed and directly connected to door rails allowing for clear, unobstructed door lines
- Available in 3-Wing or 4-Wing design
- Standard diameters 6'6" to 9' 0"
- Optional Rushclad - adhesive applied wrap around design cladding for high quality , long lasting finish

All Specifications are Subject to Change

3500 Series Revolving Door


4-Wing Model

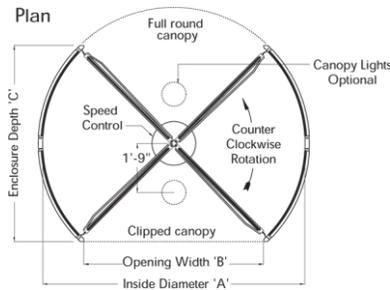

Standard 4-Wing Dimensions

DOOR DIAMETER-A	OPENING WIDTH-B	ENCLOSURE DEPTH-C
*6' 6" (1981)	4' 5 1/4" (1353)	4' 10 5/8" (1489)
*7' 0" (2134)	4' 9 1/2" (1461)	5' 2 7/8" (1597)
*7' 6" (2286)	5' 1 3/4" (1568)	5' 7 1/8" (1705)
*8' 0" (2438)	5' 6" (1676)	5' 11 3/8" (1813)


3 Wing Model

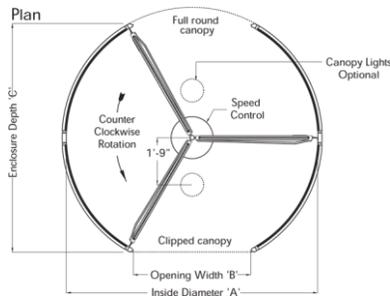

Standard 3-Wing Dimensions

DOOR DIAMETER-A	OPENING WIDTH-B	ENCLOSURE DEPTH-C
*6' 6" (1981)	3' 0 3/8" (924)	5' 11 1/4" (1810)
*7' 0" (2134)	3' 3 3/8" (1000)	6' 4 1/4" (1937)
*7' 6" (2286)	3' 6 3/8" (1076)	6' 9 7/16" (2069)
*8' 0" (2438)	3' 9 3/8" (1153)	7' 2 5/8" (2200)

Elevation

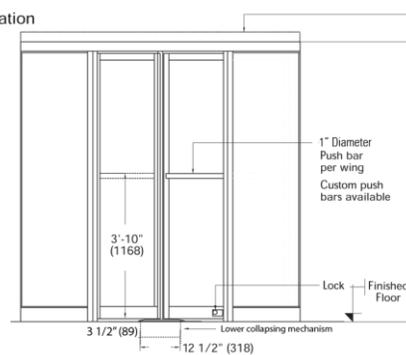

Standard 3" high canopy
Optional 6" high canopy
is required if using over-head
speed controllers on larger doors

Custom Dimensions are available in almost any size.
* Denotes standard size doors in 7' 0" (2134) height.
All other sizes and heights are custom fabricated and
finished to suit specific job requirements. IMPORTANT
NOTICE: 3-WING models have a smaller opening width
and therefore we recommend that 2 units be considered
for in/out traffic flow.

3500 Series Specifications:

Description	Standard Configuration	Options
Diameters	Shown Above	Consult Factory
Heights	7' inside height	Consult Factory
Wings	3 or 4	3 or 4
Sweeps	Felt - Rubber - Black	Consult Factory
Locks	Two	
Finishes	Anodized	Painted, Stainless Steel or Muntz Clad
Collapsing	Concealed	
Canopy	3" (75 mm), 6" (150 mm)	Consult Factory
Drum glass	5/16" (8mm)	7/16" or 1/4"
Wing glass	1/4" 6mm	Optional sizes when clad
Wing Rails/Stiles	Narrow	
Bottom bearings	Tapered, roller steel	
Speed control	Overhead, floor manual	Floor mounted hydraulic
Ceiling	One or two pieces	
Roof	Full circular	To match finish
Lights	2 optional	As requested
Custom Options	Consult Factory	

All Specifications are Subject to Change