



# CJ Rush

## Manual Contemporary Revolving Door

### Models

- 1500 Series
- 2500 Series
- 3500 Series




### "1500" Manual Series Contemporary Revolving Door

Narrow stile, fully framed door designed for long-lasting, heavy usage applications

*All specifications are subject to change.*


# 1500 Series Features

- Narrow line flush glazed door and enclosure sections
- Concealed collapsing mechanism and speed control
- Bookfold wing position factory set for emergency egress
- Easily removed door wings to provide fast and efficient service
- Tempered glass in door wings
- Standard and custom models available

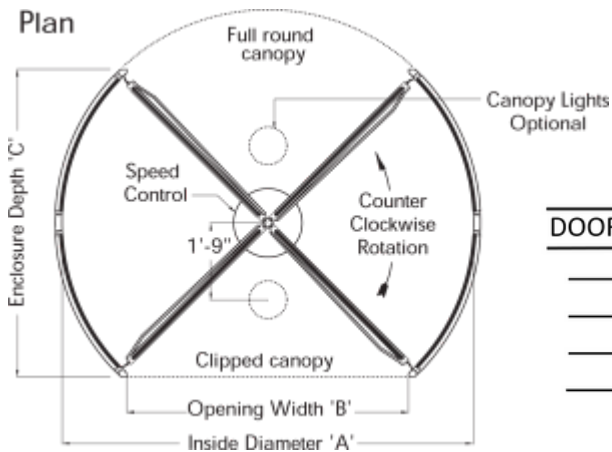

## Standard 4-Wing Dimensions


DOOR DIAMETER-A	OPENING WIDTH-B	ENCLOSURE DEPTH-C
*6' 6" (1981)	4' 5 1/4" (1353)	4' 10 5/8" (1489)
*7' 0" (2134)	4' 9 1/2" (1461)	5' 2 7/8" (1597)
*7' 6" (2286)	5' 1 3/4" (1568)	5' 7 1/8" (1705)
*8' 0" (2438)	5' 6" (1676)	5' 11 3/8" (1813)

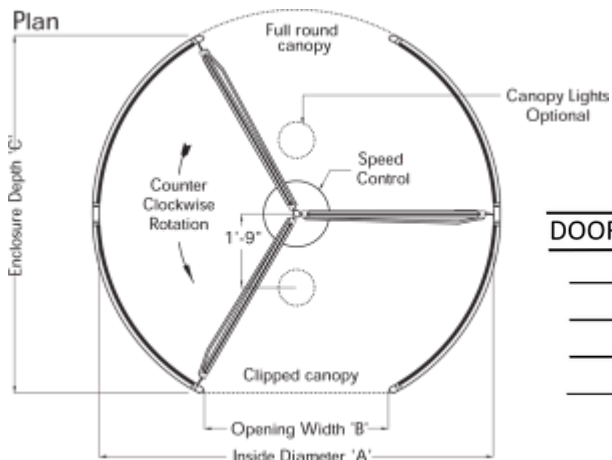

## Standard 3-Wing Dimensions

DOOR DIAMETER-A	OPENING WIDTH-B	ENCLOSURE DEPTH-C
*6' 6" (1981)	3' 0 3/8" (924)	5' 11 1/4" (1810)
*7' 0" (2134)	3' 3 3/8" (1000)	6' 4 1/4" (1937)
*7' 6" (2286)	3' 6 3/8" (1076)	6' 9 7/16" (2069)
*8' 0" (2438)	3' 9 3/8" (1153)	7' 2 5/8" (2200)

All specifications are subject to change.

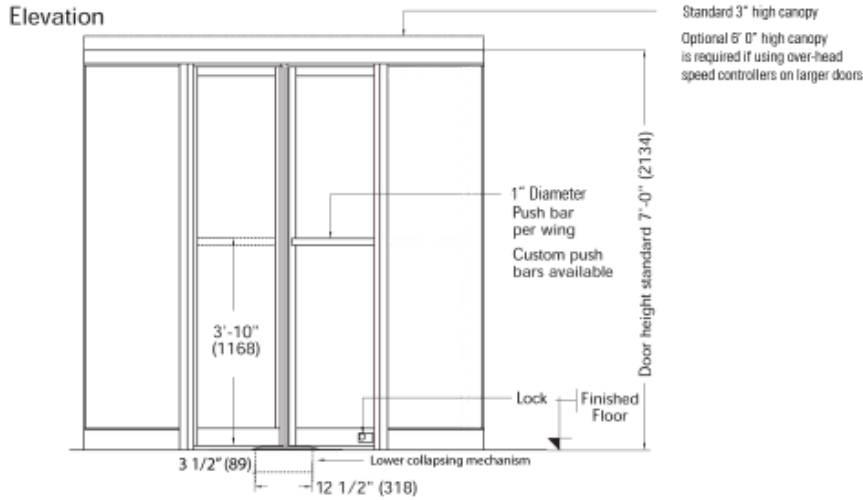

Custom Dimensions are available in almost any size.

\*Denotes standard size doors in 7' 0"(2134) height.

All other sizes and heights are custom fabricated and finished to suit specific job requirements. IMPORTANT NOTICE: 3 -WING models have a smaller opening width and therefore we recommend that 2 units be considered for in/out traffic flow.

## 1500 Series Specifications

Description	Standard Configuration	Options
Diameters	Shown Above	Consult Factory
Heights	7' inside height	Consult Factory
Wings	3 or 4	3 or 4
Sweeps	Felt - Rubber - Black	Consult Factory
Locks	Two	
Finishes	Anodized	Painted, Stainless Steel or <u>Muntz Clad</u>
Collapsing	Concealed	
Canopy	3" (75 mm), 6" (150 mm)	Consult Factory
Drum glass	5/16" (8mm)	7/16" or 1/4"
Wing glass	1/4" 6mm	Optional sizes when clad
Wing Rails/Stiles	Narrow	
Bottom bearings	Tapered, roller steel	
Speed control	Overhead, floor manual	Floor mounted hydraulic
Ceiling	One or two pieces	
Roof	Full circular	To match finish
Lights	2 optional	As requested
Custom Options	Consult Factory	

*All specifications are subject to change.*



## 2500 Series Features


- All glass flush glazed door and invisible enclosure base sections
- Concealed collapsing mechanism and speed control
- Conforms to ASTM E283 for air tightness
- Available in 3-Wing or 4-Wing design
- Standard diameters 6'6" to 9'0"
- Optional "Rushclad" - adhesive applied wrap around design cladding for high quality, long lasting finish



### "2500" Series Contemporary Revolving Door


Elegant, sleek, and polished design complimenting most building interiors

*All specifications are subject to change.*

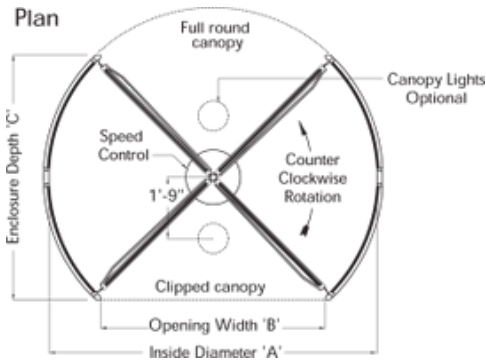


Standard 4-Wing Dimensions

DOOR DIAMETER-A	OPENING WIDTH-B	ENCLOSURE DEPTH-C
*6' 6" (1981)	4' 5 1/4" (1353)	4' 10 5/8" (1489)
*7' 0" (2134)	4' 9 1/2" (1461)	5' 2 7/8" (1597)
*7' 6" (2286)	5' 1 3/4" (1568)	5' 7 1/8" (1705)
*8' 0" (2438)	5' 6" (1676)	5' 11 3/8" (1813)

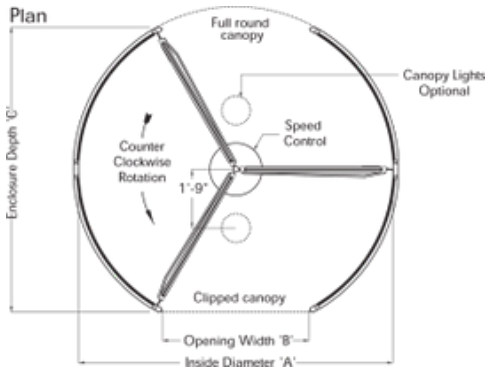

Standard 3-Wing Dimensions

DOOR DIAMETER - A	OPENING WIDTH - B	ENCLOSURE DEPTH - C
*6' 6" (1981)	3' 0 3/8" (924)	5' 11 1/4" (1810)
*7' 0" (2134)	3' 3 3/8" (1000)	6' 4 1/4" (1937)
*7' 6" (2286)	3' 6 3/8" (1076)	6' 9 7/16" (2069)
*8' 0" (2438)	3' 9 3/8" (1153)	7' 2 5/8" (2200)

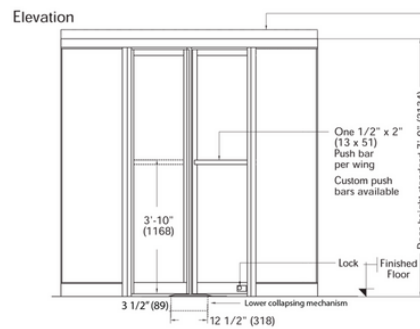

Standard 3" high canopy  
Optional 8" high canopy  
is required if using over-head  
speed controllers

Custom Dimensions are available in almost any size.  
\* Denotes standard size doors in 7' 0" (2134) height.  
All other sizes and heights are custom fabricated and  
finished to suit specific job requirements. IMPORTANT  
NOTICE: 3-WING models have a smaller opening width  
and therefore we recommend that 2 units be considered  
for in/out traffic flow.

## 2500 Series Specifications

Description	Standard Configuration	Options
Diameters	Shown Above	Consult Factory
Heights	7' inside height	Consult Factory
Wings	3 or 4	3 or 4
Sweeps	Felt - Rubber - Black	Consult Factory
Locks	Two	
Finishes	Anodized	Painted, Stainless Steel or Muntz Clad
Collapsing	Concealed	
Canopy	3" (75 mm), 6" (150 mm)	Consult Factory
Drum glass	5/16" (8mm)	7/16" or 1/4"
Wing glass	1/4" 6mm	Optional sizes when clad
Wing Rails/Stiles	Narrow	
Bottom bearings	Tapered, roller steel	
Speed control	Overhead, floor manual	Floor mounted hydraulic
Ceiling	One or two pieces	
Roof	Full circular	To match finish
Lights	2 optional	As requested
Custom Options	Consult Factory	

All specifications are subject to change.




## 3500 Series Features

- All glass - no visible door stiles
- Enclosure drum wall base rail surface mounted to the floor
- Upper and lower pressure release mechanisms are concealed and directly connected to door rails allowing for clear, unobstructed door lines
- Available in 3-Wing or 4-Wing design
- Standard diameters 6'6" to 9' 0"
- Optional "Rushclad" - adhesive applied wrap around design cladding for high quality, long lasting finish




**"3500" Series Contemporary Revolving Door**  
Modern, sleek, "all glass" look with all the bells & whistles

*All specifications are subject to change.*

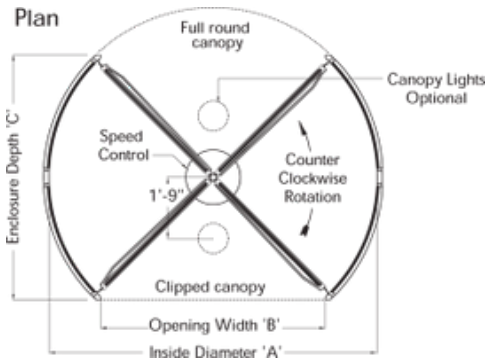


### Standard 4-Wing Dimensions

DOOR DIAMETER-A	OPENING WIDTH-B	ENCLOSURE DEPTH-C
*6' 6" (1981)	4' 5 1/4" (1353)	4' 10 5/8" (1489)
*7' 0" (2134)	4' 9 1/2" (1461)	5' 2 7/8" (1597)
*7' 6" (2286)	5' 1 3/4" (1568)	5' 7 1/8" (1705)
*8' 0" (2438)	5' 6" (1676)	5' 11 3/8" (1813)

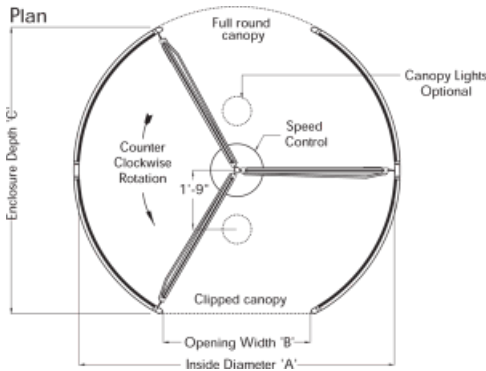

### Standard 3-Wing Dimensions

DOOR DIAMETER-A	OPENING WIDTH-B	ENCLOSURE DEPTH-C
*6' 6" (1981)	3' 0 3/8" (924)	5' 11 1/4" (1810)
*7' 0" (2134)	3' 3 3/8" (1000)	6' 4 1/4" (1937)
*7' 6" (2286)	3' 6 3/8" (1076)	6' 9 7/16" (2069)
*8' 0" (2438)	3' 9 3/8" (1153)	7' 2 5/8" (2200)

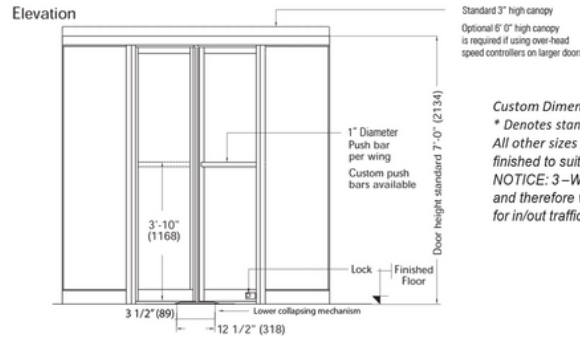

Custom Dimensions are available in almost any size.  
 \* Denotes standard size doors in 7' 0" (2134) height.  
 All other sizes and heights are custom fabricated and finished to suit specific job requirements. **IMPORTANT NOTICE:** 3-WING models have a smaller opening width and therefore we recommend that 2 units be considered for in/out traffic flow.

# 3500 Series Specifications

Description	Standard Configuration	Options
Diameters	Shown Above	Consult Factory
Heights	7' inside height	Consult Factory
Wings	3 or 4	3 or 4
Sweeps	Felt - Rubber - Black	Consult Factory
Locks	Two	
Finishes	Anodized	Painted, Stainless Steel or Muntz Clad
Collapsing	Concealed	
Canopy	3" (75 mm), 6" (150 mm)	Consult Factory
Drum glass	5/16" (8mm)	7/16" or 1/4"
Wing glass	1/4" 6mm	Optional sizes when clad
Wing Rails/Stiles	Narrow	
Bottom bearings	Tapered, roller steel	
Speed control	Overhead, floor manual	Floor mounted hydraulic
Ceiling	One or two pieces	
Roof	Full circular	To match finish
Lights	2 optional	As requested
Custom Options	Consult Factory	

All specifications are subject to change.